


The B Series

Benefits

- Euro-Probe sampling valve uses M16x2 probes
- Metal ball and seat valve allows pressure testing to 5800 psi (400 bar), not suitable for air, gas or vacuum
- **Sampling range 0 - 5800 psi (0 - 40 MPa)**

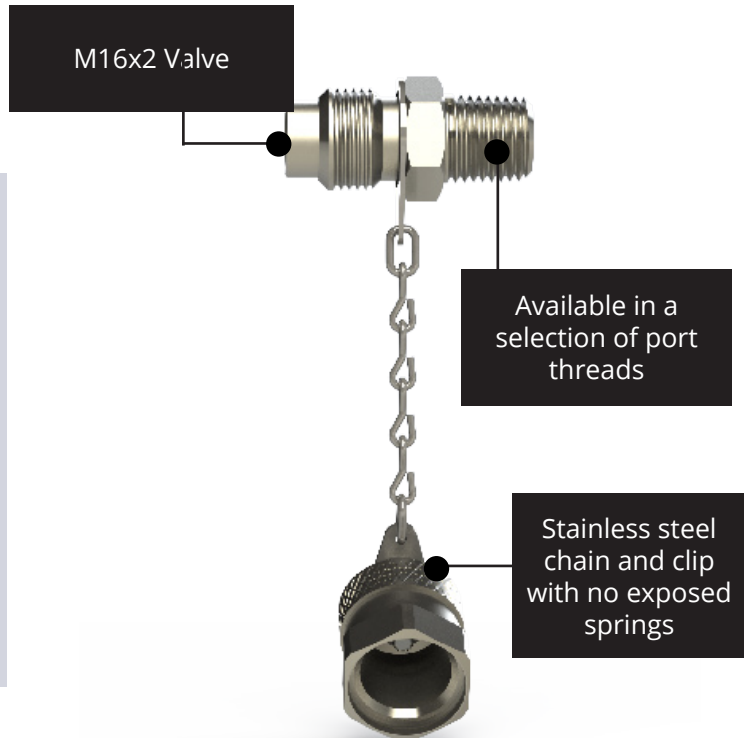

Required for Sampling:

Part	Use	Reusable?
SBF4-K2	Sampling probe for pressures below 100 psi	No
SBF4	Sampling probe for pressures below 125 psi	Yes
VHBF	Sampling probe for pressures above 125 psi	Yes
SER4	Plastic tubing (if using SBF4)	No
VAC	Vacuum pump (if using SBF4)	Yes

Looking for high pressure sampling? Review our vacuum tight patented KST probe series valve

Part Number	Port Thread Size and Type	Valve Sealing	Valve Material
B14N	1/4"-18 NPTF	Nitrile	Carbon Steel
B14NV	1/4"-18 NPTF	Viton	Carbon Steel
B14N-R	1/4"-18 NPTF	Nitrile	Stainless Steel
B14N-RV	1/4"-18 NPTF	Viton	Stainless Steel

Note: Other thread sizes available
Valve Material Options: Carbon Steel, 316 Stainless Steel

Gearboxes | Reservoirs

