


The BT Series

Benefits

- Euro-Probe sampling valve uses M16x2 probes
- Easily bend tube to capture active oil in reservoirs and gearboxes
- Swivel option available for easy in-stalls when bending tubes
- **Sampling range 0 - 500 psi (0 - 3.45 MPa)**

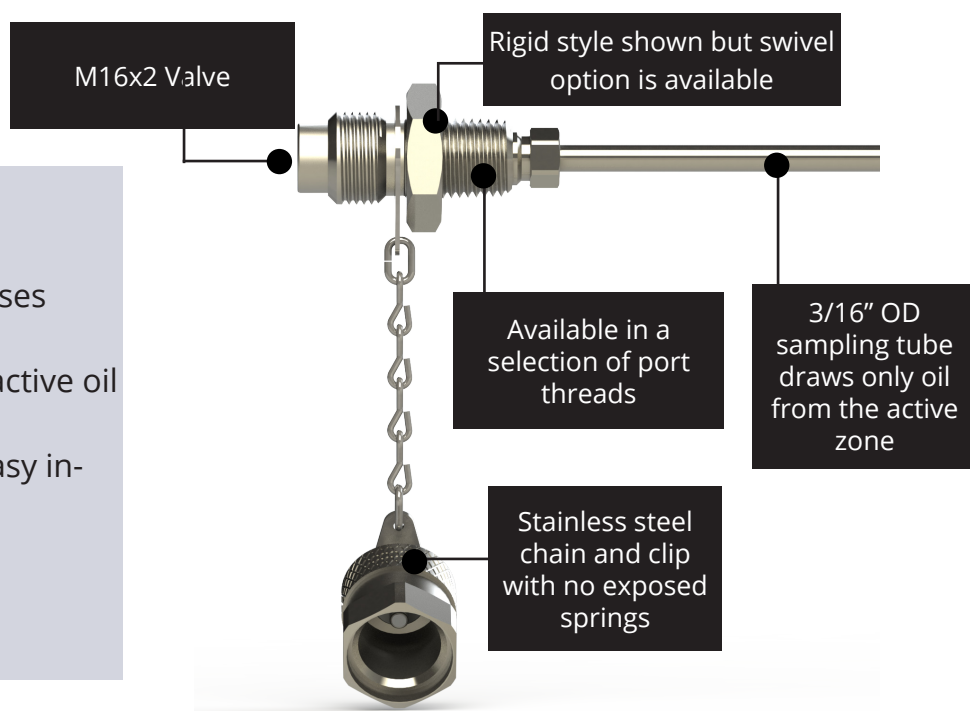

For a higher flow sampling consider the LT or LTJ Sampling Tubes

Required for Sampling:

Part	Use	Reusable?
SBF4	Sampling probe for pressures below 125 psi	Yes
VHBF	Sampling probe for pressures above 125 psi	Yes
SER4	Plastic tubing	No
VAC	Vacuum pump	Yes

Part Number	Port Thread Size and Type	Valve Sealing	Valve Material	Tube Size	Tube Material	Swivel	Tube Length
B14NTR12	1/4"-18 NPTF	Viton	Carbon Steel	3/16" OD	Stainless Steel	No	12"
B14NTRS12	1/4"-18 NPTF	Viton	Carbon Steel	3/16" OD	Stainless Steel	Yes	12"
B14NRTR12	1/4"-18 NPTF	Viton	Stainless Steel	3/16" OD	Stainless Steel	No	12"
B14NRTRS12	1/4"-18 NPTF	Viton	Stainless Steel	3/16" OD	Stainless Steel	Yes	12"

Note: Other thread sizes available, different tube lengths also available
Valve Material Options: Carbon Steel, 316 Stainless Steel

Gearboxes | Reservoirs